## Applications

Municipal jobs
Forestry
Parks
Landscaping
Golf courses
Nurseries
Hobby farmers

## Main features

Three partially overlapping blades for clean cutting with no skips.
Direct hydraulic motor drive.
Industry standard cutting blades elevate grass for better mulching capability.
Adjustable cutting height from 57 to 140 mm in 13 mm increments.
Unique attachment frame allows mower to oscillate independently of loader.
Rear discharge disperses grass clippings under the carrier, away from buildings, trees and fences.
Patented blade shutoff device stops blade rotation when mower is raised off the ground.
Anti-scalping wheel allows operator to traverse uneven terrain without scalping the surface.


## Compatibility

| Description | Item number | Compatible with loader | Compatible with telescopic |
|---|---|---|---|
| Mower 72in | 7144850 | S150-E, S160-E, T190-E, T110-E, T320-B, S630-E, S185-E, S175-E, T190-B, S250-B, S100, S130-E, S650-E, T650-E, S205-E | T2250 |
| Mower 90in | 7143993 | S150-E, S160-E, T190-E, T320-B, S630-E, S185-E, S175-E, T190-B, S250-B, T870-E, S850-E, S650-E, T650-E, S205-E | T2250 |

## Characteristics and performance

| Description | Item number | Flow range (L/min) | Number of blades | Shutoff travel height (mm) | Cutting height range (mm) | Tip speed |
|---|---|---|---|---|---|---|
| Mower 72in | 7144850 | 57.0-83.0 | 3 | 86.0 | 51.0-140.0 | 61 m/s @ 57 l/min, 89 m/s @ 83 l/min |
| Mower 90in | 7143993 | 57.0-83.0 | 3 | 86.0 | 51.0-140.0 | 59 m/s @ 57 l/min, 87 m/s @ 83 l/min |

## Weights and dimensions

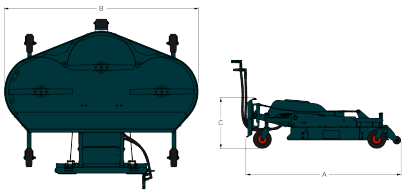

| Description | Item number | Operating weight (kg) | Shipping weight (kg) | Overall length (A) (mm) | Overall width (B) (mm) | Overall height (C) (mm) |
|---|---|---|---|---|---|---|
| Mower 72in | 7144850 | 400.0 | 400.0 | 1727.0 | 1930.0 | 559.0 |
| Mower 90in | 7143993 | 450.0 | 450.0 | 1905.0 | 2388.0 | 559.0 |


Specifications are subject to change without notice - Pictures of Bobcat units may show other than standard equipment