

Applications

Construction

Municipal jobs

Main features

For the rapid and even tamping of the backfilling material in trenches.
Extremely economic, ensuring a finished job that requires no further intervention.
Possibility of operating with the machine at the side of the trench.

Double vibratory counter-rotating shaft, situated at the centre of the wheel to guarantee considerable vertical tamping force and the elimination of horizontal vibration.
Achievement of a solid base preventing further settlement in time, guaranteeing utmost safety for traffic.
Adjustable wheel width thanks to the easy and rapid replacement of the external sections.


Compatibility

Description	Item number	Compatible with loader
Trench Compactor	6726832	S130-E, S150-E, S160-E, T190-E, T320-B, S630-E, S185-E, S175-E, T190-B, S250-B, S650-E, T650-E, S205-E

Characteristics and Performance

Description	Item number	Max working depth (mm)	Working width (mm)	Wheel diameter (mm)	Max side shift (mm)	Average working speed (m/min)	Required hydraulic flow (L/min)	Max vertical force (kg)	Vibration frequency (Hz)	Max. inclination (°)
Trench Compactor	6726832	0.0-750.0	200.0-400.0	1060.0	1100.0	5.0-50.0	45.0-60.0	42.0	30.0-40.0	18.0

Weights and dimensions

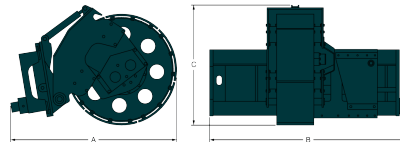

Description	Item number	Operating weight (kg)	Shipping weight (kg)	Overall length (A) (mm)	Overall width (B) (mm)	Overall height (C) (mm)
Trench Compactor	6726832	880.0	880.0	1448.0	1219.0	1499.0