Bobcat®

Backhoes

Attachments



Backhoes

Specifications

Standard features

- Easy to transport.
- Excellent down-hole visibility, easy service, shielded hoses, plenty of power.
- Uses Bob-Tach™ for quick and easy attachment changes.
- Optional equipment includes street pads and rear stabilizers for increased performance and versatility (for some models only).

Applications

- Construction
- Landscaping


	Item number	Compatible with loader
Backhoe model 406	6906310	S70
Backhoe model 625S	7135965	S100
Backhoe model 725S	6807999	S130
Backhoe model R30S	6979700	A300, S130, S150, S160, S175, S185, S205, S220, S250, S300, S330, T140, T190, T250, T300, T320
Backhoe model R35S	7126559	S220, S250, S300, S330, T250, T300, T320, A300
Bob-Tach™ backhoe	6906767	S150, S160, S175, S185, S205, T190

Weights and dimensions

	Weight without bucket (kg)	Shipping weight (kg)	Transport / Backhoe width (C) (mm)	Transport / Backhoe height (B) (mm)	Overall length (A) (mm)
Backhoe model 406	253	253	– / 914	1524 / 1143	1257
Backhoe model 625S	643	643	– / 1390	1940 / 1840	940
Backhoe model 725S	605	605	– / 1390	2007 / 1858	940
Backhoe model R30S	840	840	1809 / 1547	2320 / 2087	1317
Backhoe model R35S	850	850	– / 1547	2655 / 2535	1317
Bob-Tach™ backhoe	286	286	– / 1270	– / 452	1956

Characteristics and performance

	Digging depth (mm)	Digging force with bucket (daN)	Digging force with dipper (daN)	Digging reach (mm)	Hook-up system
Backhoe model 406	1854	978	430	2235	Pin-on
Backhoe model 625S	2480	2273	1227	3170	X-change
Backhoe model 725S	2466	2273	1227	3173	X-change
Backhoe model R30S	2990	2140	1377	3757	X-change
Backhoe model R35S	3510	3130	2257	4272	X-change
Bob-Tach™ backhoe	1829	2171	–	1956	X-change

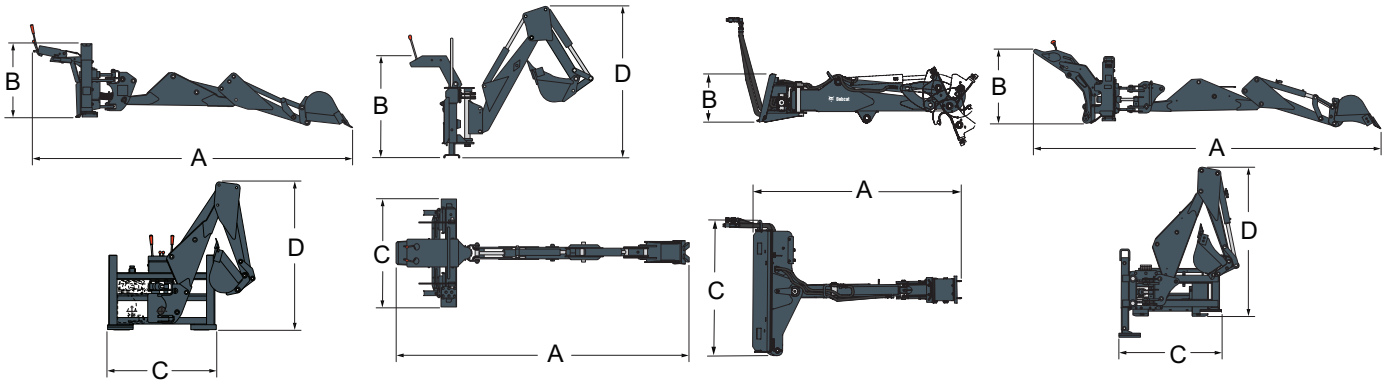

Bobcat®

www.bobcat.eu

Specifications and design are subject to change without notice. - Pictures of Bobcat units may show other than standard equipment.

©2008 Bobcat EMEA 4454290 EN (12-08)