



Bobcat®

Soil Conditioner

Attachments



Benefits

A versatile, cost-effective landscaping attachment. It saves time and labor when smoothing ruts, moving material or levelling mounds. Produces a perfect bed for seeding and sodding.

Applications

- Landscaping

Approved machines


	48 inch (122 cm)	60 inch (152 cm)	72 inch (183 cm)	72 inch (183 cm) (HF)	84 inch (213 cm)	84 inch (213 cm) (HF)
Approved for loaders:	S70, S100	S100, S130, S150, S160, S175, S185, S185H, S205, S205H, T140, T190, T190H	S130, S150, S160, S175, S185, S185H, S205, S205H, S220, S220H, S250, S250H, S300, S300H, A300, A300H, T140, T190, T190H	S160, S185H, S205H, S220H, S250H, S300H, A300H, T190H, T250H, T300H	S175, S185, S185H, S205, S205H, S220, S220H, S250, S250H, S300, S300H, A300, A300H, T190, T190H, T250, T250H, T300, T300H	S220H, S250H, S300H, A300H, T250H, T300H

Weights and dimensions

	48 inch (122 cm)	60 inch (152 cm)	72 inch (183 cm)	72 inch (183 cm) (HF)	84 inch (213 cm)	84 inch (213 cm) (HF)
Operating weight (kg)	265	503	567	567	587	587
Overall Width (mm)	1540	1821	2189	2189	2495	2495
Overall Height (mm)	688	761	761	761	755	755
Overall Length (mm)	1471	1725	1725	1725	1725	1725

Performance

	48 inch (122 cm)	60 inch (152 cm)	72 inch (183 cm)	72 inch (183 cm) (HF)	84 inch (213 cm)	84 inch (213 cm) (HF)
Working width (mm)	1220	1524	1829	1829	2134	2134
Degree of Angle (°)	±25	±25	±25	±25	±25	±25
Number of teeth	81	101	121	121	141	141
Required hydraulic flow (l/min)	38-68	49-140	49-140	95-140	68-140	113-140
Angle adjustment	Manual	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic
Working width fully angled (mm)	1161	1382	1651	1651	1930	1930
Depth adjustment	Manual	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic
Tires	Pneumatic	Pneumatic	Foamfilled	Foamfilled	Foamfilled	Foamfilled

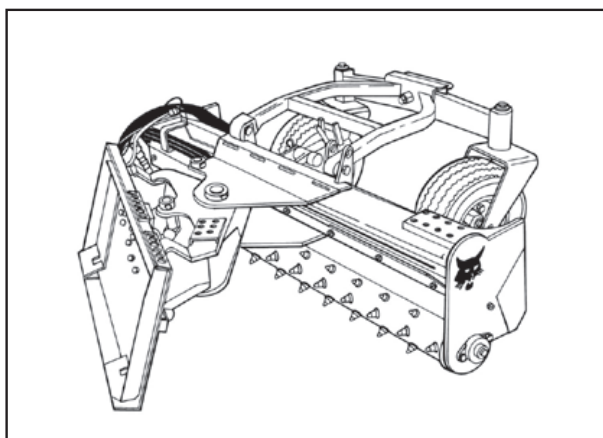

www.bobcat.eu